



Self-Propelled Articulating Boom

Z-60/34TM

○ Designed to
increase productivity
in demanding
construction and
industrial
applications.



Z-60/34




Standard Features

- 20.3 m (66 ft) working height
- 10.4 m (34 ft) horizontal reach
- 227 kg (500 lb) lift capacity
- Tier II emission capable engine
- Diesel engine or dual fuel option (petrol/LPG)
- Fully proportional platform controls with ramp up/down feature
- Hydraulic platform rotation
- 360° continuous turntable rotation
- 12V DC auxiliary power unit
- Fuel select switch on platform and ground controls (Petrol/LPG models)
- Closed-loop hydrostatic drive
- Positive traction drive
- Drive enable system
- Full time 4 wheel drive (on 4WD models)
- Hall effect joystick controllers
- Full time active oscillating axle
- Self-leveling platform
- Locking turntable covers
- Anti-restart engine protection
- Auto engine fault shutdown
- AC wiring to platform
- Tilt alarm
- Horn
- Hour meter
- Foot switch time-out

Options and Accessories

- Alarm package
- Cold start packages
- 5000 watt AC generators
- 1.83m (6 ft) steel platform
- Platform swing gate
- Air line to platform
- Platform rail pinch guard
- Platform work lights
- Lockable platform control box cover
- Tool tray
- Fluorescent tube caddy
- Hostile environment packages
- GS/LPS rating for Ford engine-powered machines
- Engine monitoring gauges
- Tow package (4x2 models only)
- Driving lights

Range of Motion

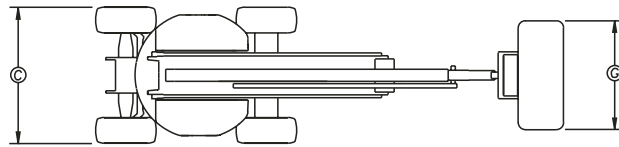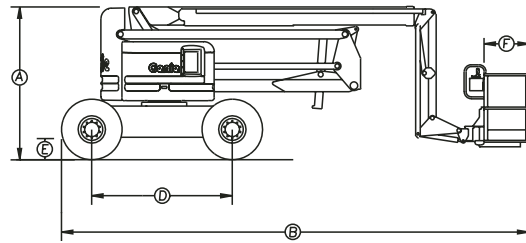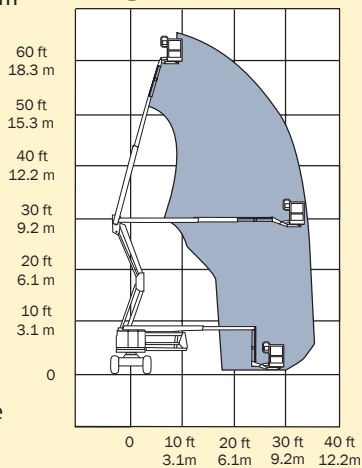

Specifications

Model	4x2/4x4	US
Working height max*	20.3 m	66 ft
Platform height max	18.3 m	60 ft
(A) Height - stowed	2.64 m	8 ft 8 in
(B) Length - stowed	7.9 m	26 ft
(C) Width	2.41 m	7 ft 11 in
(D) Wheelbase	2.54 m	8 ft 4 in
(E) Ground clearance	40 cm	16 in
(F) Platform length: 6 ft	76 cm	30 in
8 ft	91 cm	36 in
(G) Platform width: 6 ft	1.83 m	72 in
8 ft	2.44 m	96 in
Horizontal reach max	10.4 m	34 ft
Up and over clearance	8.23 m	27 ft
Lift capacity	227 kg	500 lb
Turning radius - outside	4.1 m	13.5 ft
Turning radius - inside	1.2 m	4 ft
Turntable rotation	360° continuous	
Tailswing	zero	
Power source	Deutz Diesel F3L 2011 48 hp (35.8 kW)	
	Ford LRG-425 petrol EFI 82 hp (61.1 kW)	
	Perkins 404C-22 diesel 51hp (38 kW)	
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised ¹	1 km/h	0.6 mph
Controls	12V DC proportional	
Platform rotation	180°	180°
Auxiliary power unit	12V DC	
Tyres	15x19.5, 12 ply	
Gradeability ² 2 WD	25%	25%
4 WD	40%	40%
Hydraulic tank capacity	170 litre	45 gal
Fuel tank capacity	125 litre	33 gal
Weight**	9,929 kg	22,055 lb

1 In lift mode (platform raised), the machine is designed for operation on firm level surfaces only.
2 Stowed position only.

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
** Weight will vary depending on options and/or country standards.

Standards Compliance

- CE EN280
- AS1418-10

Distributed By:

Genie
A TEREX COMPANY

GENIE AUSTRALIA
591 Boundary Road, Darra, QLD 4076
PO BOX 394, Richlands, QLD 4077
Telephone **07 3375 1660**
Toll Free in Australia **1800 331 660**
Fax 07 3375 1002
<http://www.genieindustries.com>

GENIE UNITED STATES
18340 NE 76th Street
P. O. Box 97030
Redmond, Washington 98073-9730
Telephone **+1 (425) 881-1800**
Fax +1 (425) 883-3475
<http://www.genieindustries.com>