

Standard Features

- Over 15.8 m (51 ft) working height
- Over 7.3 m (24 ft) horizontal reach
- Up and over clearance of over 6.7 m (22 ft)
- 1.52 m (5 ft) turning radius
- 227 kg (500 lb) lift capacity
- Fully proportional controls
- Hydraulic platform rotation
- 24V DC auxiliary power unit
- Drive enable system

- End mount platform on Z-45/25J models
- AC wiring to platform
- Tilt alarm
- Horn
- Hour meter
- Industrial air tyres




Options and Accessories

- Alarm package
- Platform swing gate
- Air line to platform
- Full rail platform pinch guard
- Platform work light
- Platform control box cover
- Foam filled and non-marking tyre packages

Standards Compliance

- ANSI/SIA A92.5
- CSA CAN3-B354.4-M82
- CE compliance option
- AS 1418.10

Range of Motion

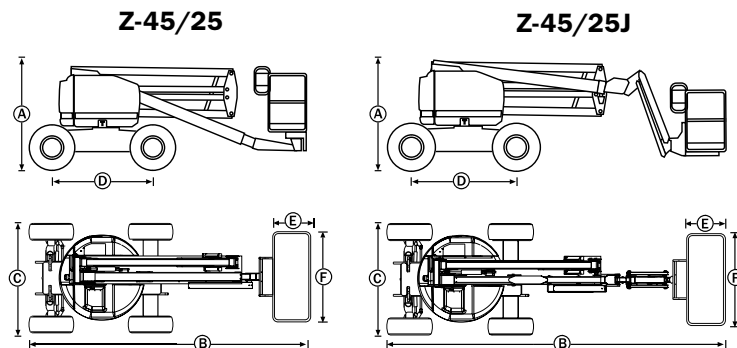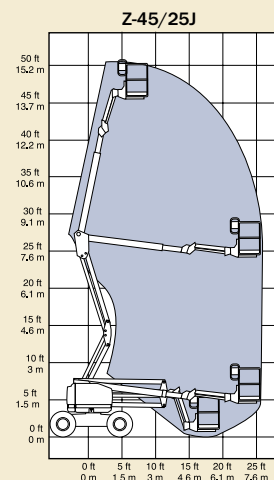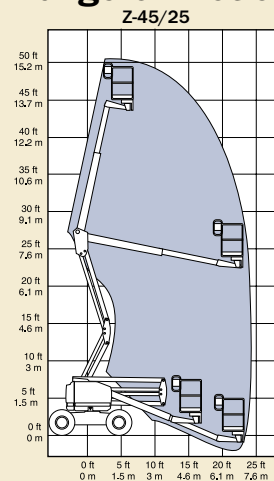

Specifications

	Z-45/25		Z-45/25J	
	Metric	US	Metric	US
Working height*	15.8 m	51 ft 5 in	15.8 m	51 ft 3 in
Platform height	13.9 m	45 ft 6 in	13.9 m	45 ft 6 in
(A) Height - stowed	2 m	6 ft 7 in	2 m	6 ft 7 in
(B) Length - stowed	5.5 m	18 ft	6.8 m	22 ft 3 in
(C) Width	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in
(D) Wheelbase	2.03 m	6 ft 8 in	2.03 m	6 ft 8 in
Ground clearance - center	22 cm	8 1/2 in	22 cm	8 1/2 in
Ground clearance - min	18 cm	7 in	18 cm	7 in
(E) Platform length	76 cm	30 in	76 cm	30 in
(F) Platform width	1.83 m	72 in	1.83 m	72 in
Horizontal reach max	7.5 m	24 ft 6 in	7.7 m	25 ft 3 in
Up and over clearance	6.9 m	22 ft 6 in	6.9 m	22 ft 6 in
Lift capacity	227 kg	500 lb	227 kg	500 lb
Turning radius - inside	1.52 m	5 ft	1.52 m	5 ft
Turntable rotation	359° non-continuous		359° non-continuous	
Turntable tailswing	zero		zero	
Platform rotation	180°		160°	
Power source	48V DC (8 6V 315 AH batteries) or 48V DC with Kubota Diesel 12 hp (9 kw)			
Drive speed - stowed	4.8 kph	3 mph	4.8 kph	3 mph
Drive speed - raised	1 kph	0.6 mph	1 kph	0.6 mph
Lift speed to full height	90 sec		90 sec	
Controls	24V DC proportional			
Auxiliary power unit	24V DC			
Tyres	9 - 14.5			
Gradeability - stowed	30%			
Hydraulic tank capacity	30 litres	8 gal	30 litres	8 gal
Fuel tank capacity	34 litres	9 gal	34 litres	9 gal
Weight - DC**	7,214 kg	15,900 lb	7,272 kg	16,032 lb
Weight - Bi-Energy**	7,305 kg	16,100 lb	7,380 kg	16,272 lb

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
** Weight will vary depending on options and/or country standards.



**Self-Propelled
Articulating
Boom**

Efficient electric
or Bi-Energy power
for all day use.



Distributed By:

Genie Industries

GENIE AUSTRALIA
591 Boundary Road
Darra Qld 4076
P.O. Box 394
Richlands Qld 4077
Telephone **07 3375 1660**
Fax 07 3375 1002
<http://www.genielift.com>

GENIE UNITED STATES
18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073 9730
Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475
<http://www.genielift.com>

GENIE UNITED KINGDOM
The Maltings, Wharf Road
Grantham Lincolnshire
NG31 6BH England
Telephone: **+44 (0)1476 584333**
Fax: +44 (0)1476 584334
<http://www.genielift.com>

For further information, please contact your local distributor or the Genie sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to appropriate "Genie Z-45/25 and Z-45/25J Operator's Manual" for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie Z-45/25 or Z-45/25J or to otherwise act irresponsibly, may result in serious injury or death. Copyright ©1998 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. "Z" is a Registered Trademark and "Z-45/25" is a Trademark of Genie Industries. Z45DC 5K 0202F. Part No. 65025 GEN286 Printed June 2002.

Make short work of big jobs.

With an extended reach, models with jibs, and a variety of outstanding performance features, the Z-45/25 DC/Bi-Energy handles the most challenging high-reach jobs. The revolutionary Genie Bi-Energy system combines the quiet, emission-free and efficient operation of a 48V DC machine with the versatility of a diesel generator powered machine to provide a boom that is ideal for indoor and outdoor applications.



Articulating Booms

Quick and Manoeuvrable

The Z-45/25's enhanced design helps get you where you need to go, quickly and easily. The new 1.52 m (5 ft) inside turning radius delivers excellent manoeuvrability. Z-45/25J models with a 1.52 m (5 ft) articulating jib boom are also available to provide a 135° range of motion.

Unsurpassed Speed and Gradeability

This 4x2 is the fastest boom in its class. Travels 4.8 km/h (3 mph) with 30% gradeability.

Dual Parallelogram Riser

Advanced design allows ascent and descent along a vertical plane with or without retraction or extension of the boom.

Large Platform with Hydraulic Rotation

The standard 1.83 m (6 ft) all-steel platform lifts up to 227 kg (500 lb). Dimensions of 76 cm x 1.83 m (30 x 72 in) allow ample space for two workers and their tools. Platform features a 180° hydraulic rotation for Z-45/25 models and a 160° hydraulic rotation for Z-45/25J models. Also includes automatic platform levelling with a manual hydraulic over-ride system and an AC power outlet.

Ground Controls

Located at eye level with easy to understand controls and including auxiliary power, key switch, emergency stop, hour meter and all boom functions.

Safety in Sight

All instructional and safety decals are straight-forward and conveniently located to be clearly visible.

Drive Enable System

Informs operator when the drive and steer functions will move opposite controller movements.



Power for the Long Haul

The Bi-Energy always operates with the all new, Sep-Ex 48V DC drive system and has the added feature of an on-board diesel powered generator. The generator acts as a 100 amp battery charger to provide enough electrical power to operate all boom functions even when the batteries are fully discharged.

The Kubota Z482, 12 hp, water cooled, 2-cylinder, diesel powered generator package will charge a fully discharged machine in only 3.5 hours.

The Kubota Z482 diesel will operate for approximately 17 hours before refuelling is necessary.

The direct electric, 48V drive system provides outstanding battery life when not using the engine generator.

An on-board 25 amp AC charger is standard to provide a means for overnight charging.

Reach

The 15.8 m (51 ft) working height, outreach of over 7.3 m (24 ft) – for both the Z-45/25 and Z-45/25J models – and up and over clearance of over 6.7 m (22 ft) lets you reach higher and farther than ever before.

Increased Strength

Larger, stiffer primary boom and extension tubes offer increased strength and durability. Improved cable track includes box tube support combined with a wider plastic track.

Fewer Parts Overall

Commonality among all Z-45/25 models results in fewer service requirements.

Maintenance Made Easy

The Bi-Energy component tray swings out 90° for complete accessibility during routine maintenance and repairs.

